

H2O AVANT INSTANTANEOUS COOLERS



CHARACTERISTICS AND FUNCTIONS


- Energy Saving System
- 304 Stainless steel
- Indirect refrigerating
- Triplex
- Two Stage Cooling System
- Free pump system
- 43°C tropicalization index
- Polyurethane tanks CFC free
- Non-polluting HFC refrigerants
- Ice Controls System

OPTIONAL

- Base or adjustable feet

	H2O AVANT 60	H2O AVANT 100	H2O AVANT 160	H2O AVANT 240	H2O AVANT 300	H2O AVANT 500
Width (mm)	750		850			
Depth (mm)	530			600		
Height (mm)	625			1115		
Production (l/h)	60	100	160	240	300	500
Amount of sample size (1/4 of the amount produced)	15	25	40	60	75	125
Capacity (l/min)	10 ÷ 12					15 ÷ 18
Power supply (V - Hz)	230/1/50 + N + T			400/3/50 + N + T		
Electrical power (kW)	0,8	1,2	1,8	2,6	3,3	5,5
Electrical plug	SCHUKO			3P + N + T 16A		
Hydraulic connections (IN & OUT)	G ½" F					
Inlet pressure from water supply (bar)	2,5 ÷ 3,5					
Weight when full (Kg)	130	135	150	220	230	280
Weight when empty (Kg)	70	75	90	130	140	190

H₂O AVANT 60/100/160

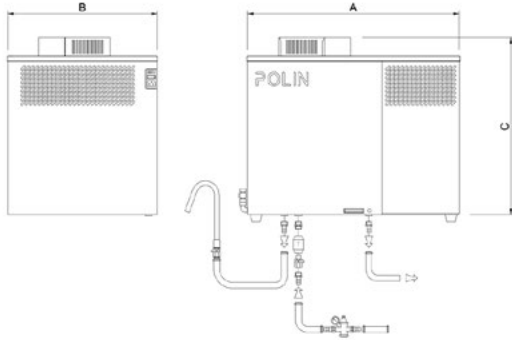

H₂O AVANT 240/300/500

