


# UX-DOWNLIGHT 211 POLISHED

## 2x18W,TC-D, MB B2,9003

Order code: DA4401321832000

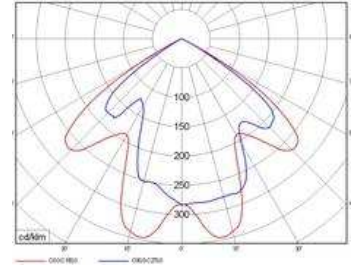

Gross weight	1.80 kg
LOR	68 %
LLPW	46.00 lm/w
Pallette quantity	100 pc

Lighting fixtures Downlights are suitable especially for mounting into different kinds of ceiling boards. The Downlights are best suited to office, classroom, sales areas, showrooms, presentation of merchandise, public buildings, banks, museums, hotels, exhibition halls, entrance areas, decorative entrance areas, foyers, corridors, staircases, conference rooms, etc.

### CONSTRUCTION

Housing: galvanized sheet

Reflectors: aluminium with various types of surface

finish – polished, mat, facet

Ring: sheet steel, electrostatic powder coat finish RAL

9003 (signal white), other finish types – RAL 9006 (white

aluminium), chrome or brass available on request

Ballast box: galvanized sheet steel, holders to prevent

conductors from loosening off the terminal box, two rubber

reducing adapters for conductors (through mounting

possible)

Ceiling attachment of the luminaire is done using two

metal springs, adjustable for various ceiling widths.

### ELECTRICAL COMPONENTS

Luminaires can be equipped with conventional control

gear (EEI=B2, standardly not compensated), electronic

(EEI=A2) or dimmable electronic control gears (EEI=A1,

1-10V, switch DIM, DALI)

Light sources shall be ordered separately.

### ACCESSORIES

- an independent metal box for separate placement of the ballast apart from the luminaire (separate gear box version):

- on request, they can be delivered with one or two connectors allowing fast electrical connection: 3-pole connectors Wieland gesis GST 18i3, Wago Winsta 770, AAG Stucchi 1601A/1602A

	OPTIC			POWER	LAMP	DIMENSIONS					OPENING		EMERGENCY		
	POLISHED	MAT	FACET			D1	D2	L1	L1/SB	H1	H2	A1	O1	1H	3H
UX-Downlight 201	*	*	*	1x13	TC-D,TC-DEL	195	155	305	212	100	44	152	175	*	*
UX-Downlight 201	*	*	*	1x18	TC-D,TC-DEL	195	155	305	212	100	44	152	175	*	*
UX-Downlight 201	*	*	*	1x26	TC-D,TC-DEL	195	155	305	212	100	44	152	175	*	*
UX-Downlight 201	*	*	*	2x13	TC-D,TC-DEL	195	155	305	212	100	44	152	175	*	*
UX-Downlight 201	*	*	*	2x18	TC-D,TC-DEL	195	155	305	212	100	44	152	175	*	*
UX-Downlight 201	*	*	*	2x26	TC-D,TC-DEL	195	155	305	212	100	44	152	175	*	*
UX-Downlight 211	*	*	*	1x18	TC-D,TC-DEL	230	196	359	250	126	70	172	205	*	*
UX-Downlight 211	*	*	*	1x26	TC-D,TC-DEL	230	196	359	250	126	70	172	205	*	*
UX-Downlight 211	*	*	*	1x32	TC-TEL	230	196	359	250	126	70	172	205	*	*
UX-Downlight 211	*	*	*	1x42	TC-TEL	230	196	359	250	126	70	172	205	*	*
UX-Downlight 211	*	*	*	2x18	TC-D,TC-DEL	230	196	359	250	126	70	172	205	*	*
UX-Downlight 211	*	*	*	2x26	TC-D,TC-DEL	230	196	359	250	126	70	172	205	*	*
UX-Downlight 211	*	*	*	2x32	TC-TEL	230	196	359	250	126	70	172	205	*	*
UX-Downlight 221	*	*	*	1x18	TC-D,TC-DEL	267	228	378	269	128	72	172	240	*	*
UX-Downlight 221	*	*	*	1x26	TC-D,TC-DEL	267	228	378	269	128	72	172	240	*	*
UX-Downlight 221	*	*	*	1x32	TC-TEL	267	228	378	269	128	72	172	240	*	*
UX-Downlight 221	*	*	*	1x42	TC-TEL	267	228	378	269	128	72	172	240	*	*
UX-Downlight 221	*	*	*	2x18	TC-D,TC-DEL	267	228	378	269	128	72	172	240	*	*
UX-Downlight 221	*	*	*	2x26	TC-D,TC-DEL	267	228	378	269	128	72	172	240	*	*
UX-Downlight 221	*	*	*	2x32	TC-TEL	267	228	378	269	128	72	172	240	*	*

